

MaxiPlug Uncorded Earplugs – Class 5, bag of 300



PRODUCT DATA SHEET

ITEM CODE: HEU649

Product Overview

- **Materials:** Polyurethane
- **Class Protection:** Class 5
- **SLC80 Rating:** 26dB
- **Country of Origin:** China

Applications


Agriculture and Forestry
Chemical
Construction
Fire Protection
Manufacturing
Medical
Military
Mining
Municipal
Services
Oil and Gases
Steel and Metals
Transportation
Welding



Standards and Certification



Fitting Instructions

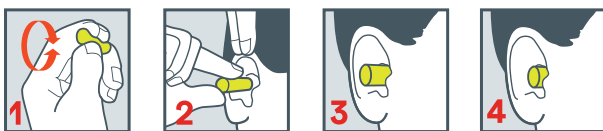

1. Before using ear plugs, ensure hands are clean. Roll ear plugs between fingers to compact foam.

2. Pull top of ear up and out while inserting earplug. This straightens out the ear canal. Insert ear plug as far as possible into the ear canal. Hold for approx 60 seconds to allow foam to expand.

3&4. When ear plugs are inserted correctly the top of the ear plug should be as per fig 4. To test fit cup both hands over your ears. When you pull them away you should notice a significant difference in noise levels. If unsure consult your safety officer.

Storage

Earplugs must be stored in a clean, uncontaminated area.

Maintenance

Ear plugs are to be regularly inspected for serviceability.

Packaging

Pack Qty: 300 pairs


Carton Qty: 10 packs

MaxiPlug Uncorded Earplugs

– Class 5, bag of 300

PRODUCT DATA SHEET
ITEM CODE: HEU649

Guide to Sound Levels

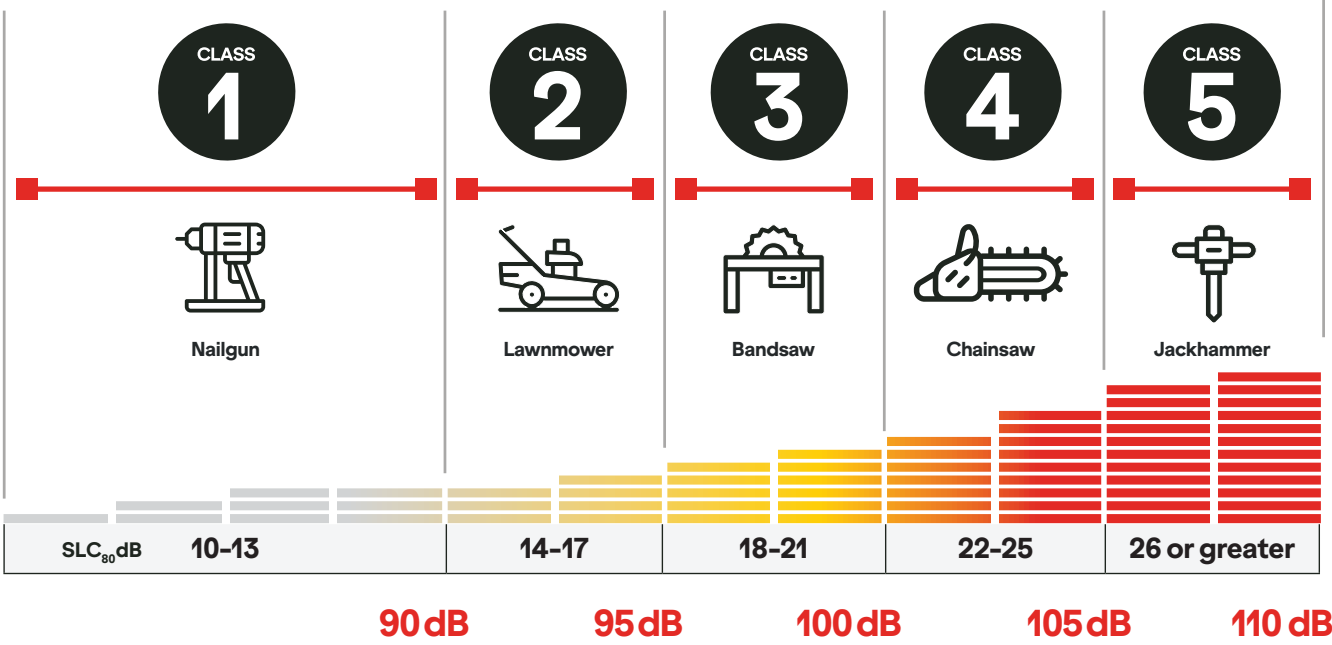

Freq. Hz	125	250	500	1000	2000	4000	8000	Clamping Force	SLC ⁸⁰	Class
Mean	27.2	28.1	33.3	32.7	34.8	41.2	42.3	N/A	26	5
Std. Deviation	8.7	9.1	11.7	9.6	6.9	6.7	6.8			
Mean SD	18.5	19.0	21.6	23.1	27.9	34.6	35.5			